




TOP VIEW (EXTERNAL CASING)

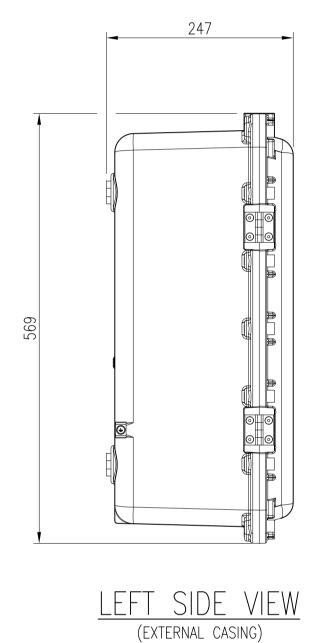


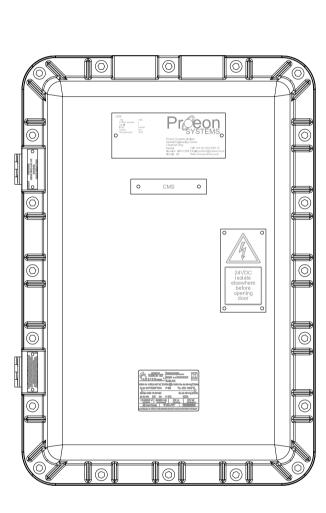


FRONT VIEW (EXTERNAL CASING)

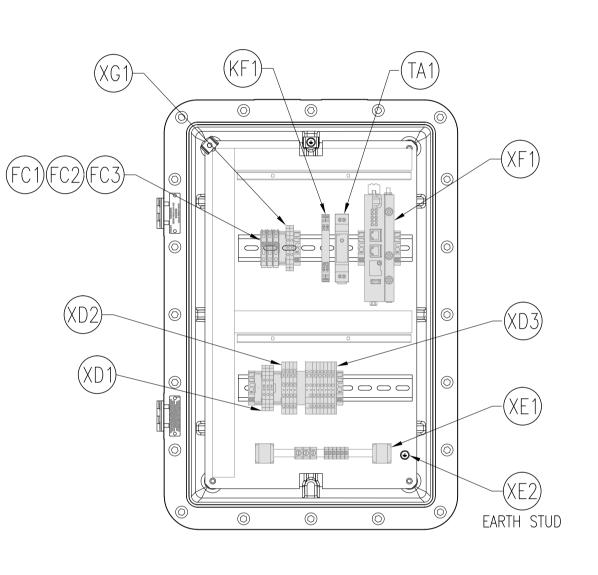

<u>FRONT VIEW</u> (INTERNAL)

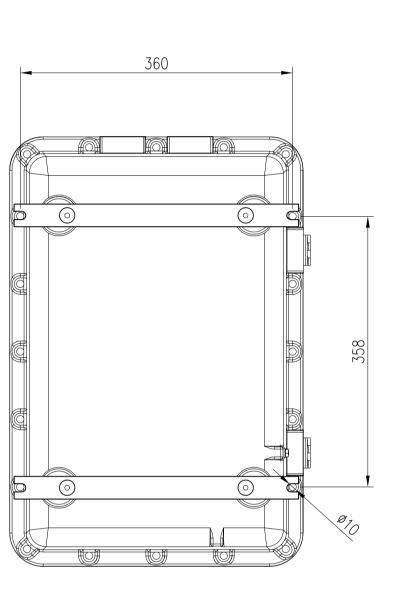

<u>rear view</u> (MOUNTING DETAILS)

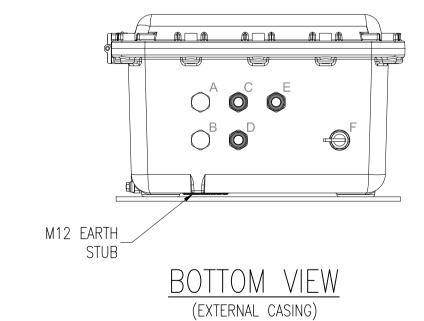



1. SENSOR TO BE MOUNTED ON "L" BRACKET WITH X,Y,Z ORIENTATION AS SHOWN.

ENCLOSURE SPECIFICATION:

– EJB–45B ENCLOSURE TYPE:

- Ex II 2 G Ex db IIB+H2 **CERTIFICATION:**

CERTIFICATION NUMBER, ATEX: - TBA CERTIFICATION NUMBER IECEx: — TBA

AMBIENT TEMPERATURE: - 20°C to +55°C

- IP66 IP RATING:

- MARINE GRADE COPPER FREE ALUMINIUM LIGHT ALLOY ENCLOSURE MATERIAL:

- PAINTED TO RAL7035 PAINT FINISH

MATERIAL QUALITY IN SCREWS: - 316L STAINLESS STEEL

EMPTY WEIGHT: – 33.1kg

FIXING DETAILS: - x4 10mm BOLTS



			1			
A		INTER-DISCIPLINARY CHECK	JSC	RR		
REV	DATE	DESCRIPTION	DRN	CHK	ENG	AF
C		Orwell Landing Fox's Marina, Ipswich Suffolk IP2 8NJ	LTD. ITS CO RECEIVED RI IMPARTED TO FOR ANY O	S IS THE PROP DINTENTS OR . ELATING TO IT ANY 3RD PAR THER CONTRAC	ANY OTHER I MUST NOT BE RTY. IT MUST N CT. THE RECE	NFORMA COPIE NOT BE IPT OF



OMS

CONDITION MONITORING SYSTEM (CMS) ENCLOSURE GENERAL ARRANGEMENT

SHEET No.: SCALE: ORIG.: REV.: OMS-12001-DE-950 05 | 1:5 | A1 | A